


P-3D MOVER

Moves your RealD™ unit in front of your DCI projector.

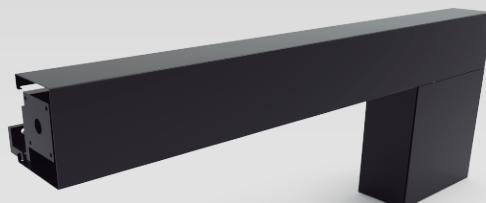

P-3DMover is a motorized device to place the RealD™ 3D units in 3D position, right in front of the lens, and back to 2D position, away from the lens.


It can be triggered automatically by the cinema server, remotely via Ethernet or even manually using push buttons located in the P-3DMover chassis.

Simple to use and easy to install, it works coupled to the XL-Core guides. P-3DMover is compatible with RealDTM XL and XLW. It can be quickly released from the XL-Core™ guides in order to operate it manually, without the need to use any tool. P-3DMover features a gear motor encoder to reach accurate and repeatable 3D and 2D positions.

TECHNICAL CHARACTERISTICS

- 3D system compatibility: RealD™ XL and XLW.
- Mechanical compatibility: All DCI projectors and pedestals.
- Triggering: DCI servers, web browser or local pushbuttons.
- Pushbuttons: 2D position, 3D position, reset position.
- Motor: 1.7 Nm.
- Mechanical actuator type: Leadscrew.
- Power: 220 V ac.
- Power consumption: 60W.
- Connections: RJ-45.
- Weight: 16.7 kg.
- Dimensions:
853 mm (33.6") x 322 mm (12.7") x 148.5 (58.5")

GENERAL MEASURES

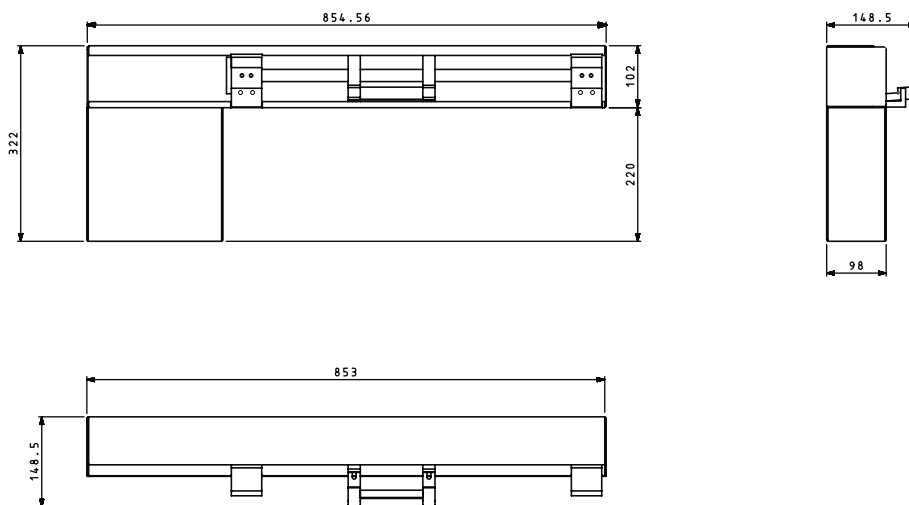

P-3D MOVER

Move your RealD™ unit in front of your DCI projector.



P3D-Mover WebAdmin

Motor

Configuration

Motor

2D		3D
Backward	Stop	Forward
Fine Backward		Fine Forward

set 2D position set 3D position

2D position: 0
3D position: 11213
Up Time: 0 days 1 hours 10 minutes 49 seconds.

Serial Number: pRDM12
Firmware version: 1.7

Web interface window for monitoring and control

P3D-Mover WebAdmin

Motor

Configuration

Configuration

This page allows the configuration of the device settings.

CAUTION: Incorrect settings may cause the board to lose network connectivity.

Enter the new settings for the board below:

MAC Address:	74:69:69:2D:30:32
Host Name:	esproyvalpds0002
	<input type="checkbox"/> Enable DHCP
IP Address:	10.0.12.177
Mask:	255.255.224.0
Gateway:	10.0.0.254
TCP Port:	48488
	Save

NTP IP:	217.147.223.78
GMT±:	2
Current Time:	17:39:41 31/5/2018
	Update Time

Restart Device

Web interface window for configuration